

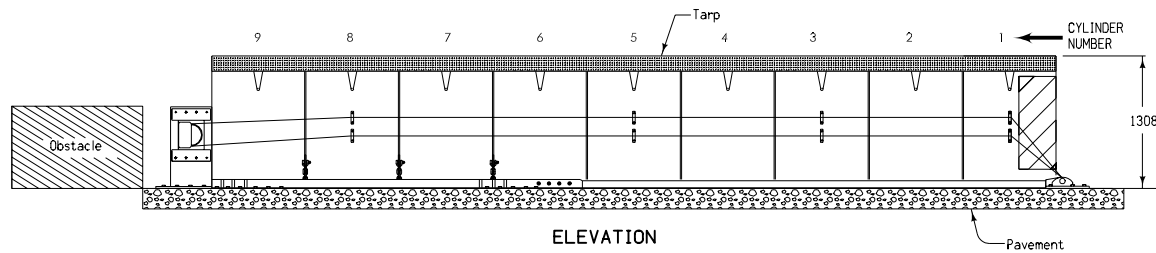
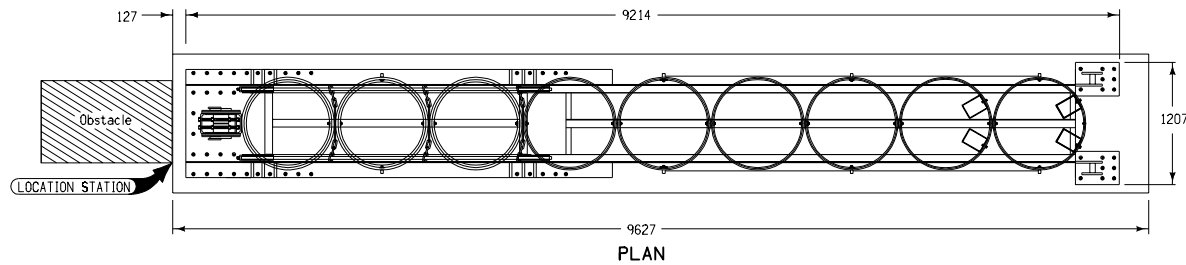


REACT 350

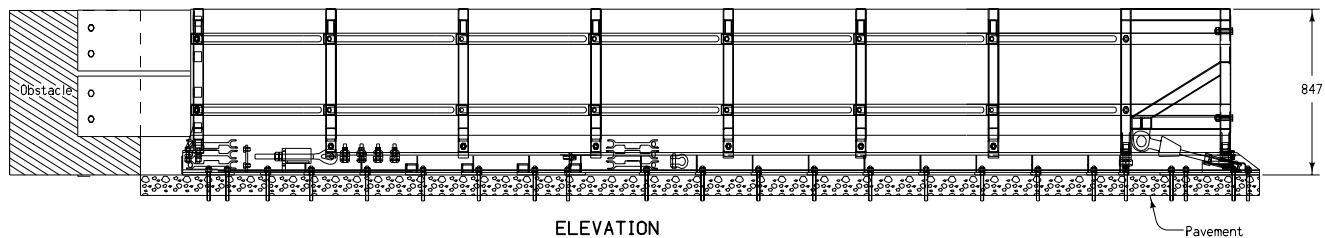

SCI100GM

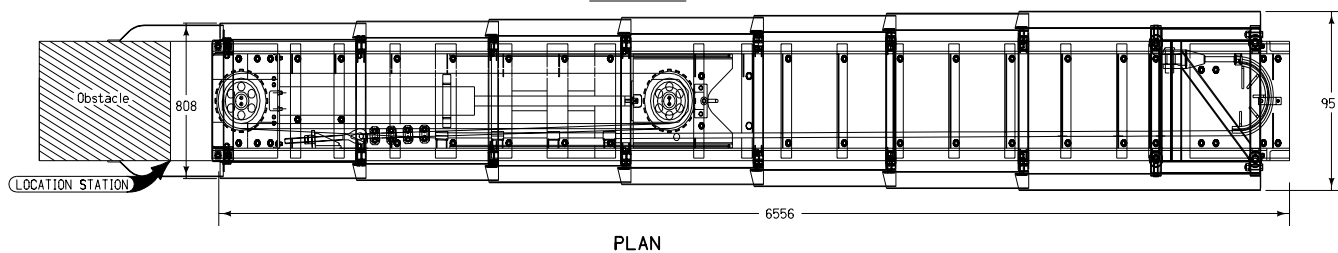

Approaching the work zone, a NCHRP Report 350, Test Level 3 (100 km/hr) unit shall be used, as shown on this sheet

Within the work zone, a 90 km/hr unit may be used. Contact the manufacturer for details.


Depending on how traffic is staged, the same temporary attenuator may be used at more than one location. Because of this, the total number of attenuators needed may be less than the number of locations tabulated.

Contract Item:

Temporary Attenuators, Severe Use (SU)

Tabulation: 108-30

All dimensions given in millimeters unless noted.

M METRIC VERSION	Iowa Department of Transportation Highway Division		
	STANDARD ROAD PLAN		RE-87
	REVISION: NEW. Replaces Standard Road Plan RE-73.		REVISION NO. NEW
	 APPROVED BY DESIGN METHODS ENGINEER		REVISION DATE 10-18-05
	TEMPORARY ATTENUATORS SEVERE USE		